


# GN 1000

GN Range: 100 kHz - 200 MHz / 1000 W CW

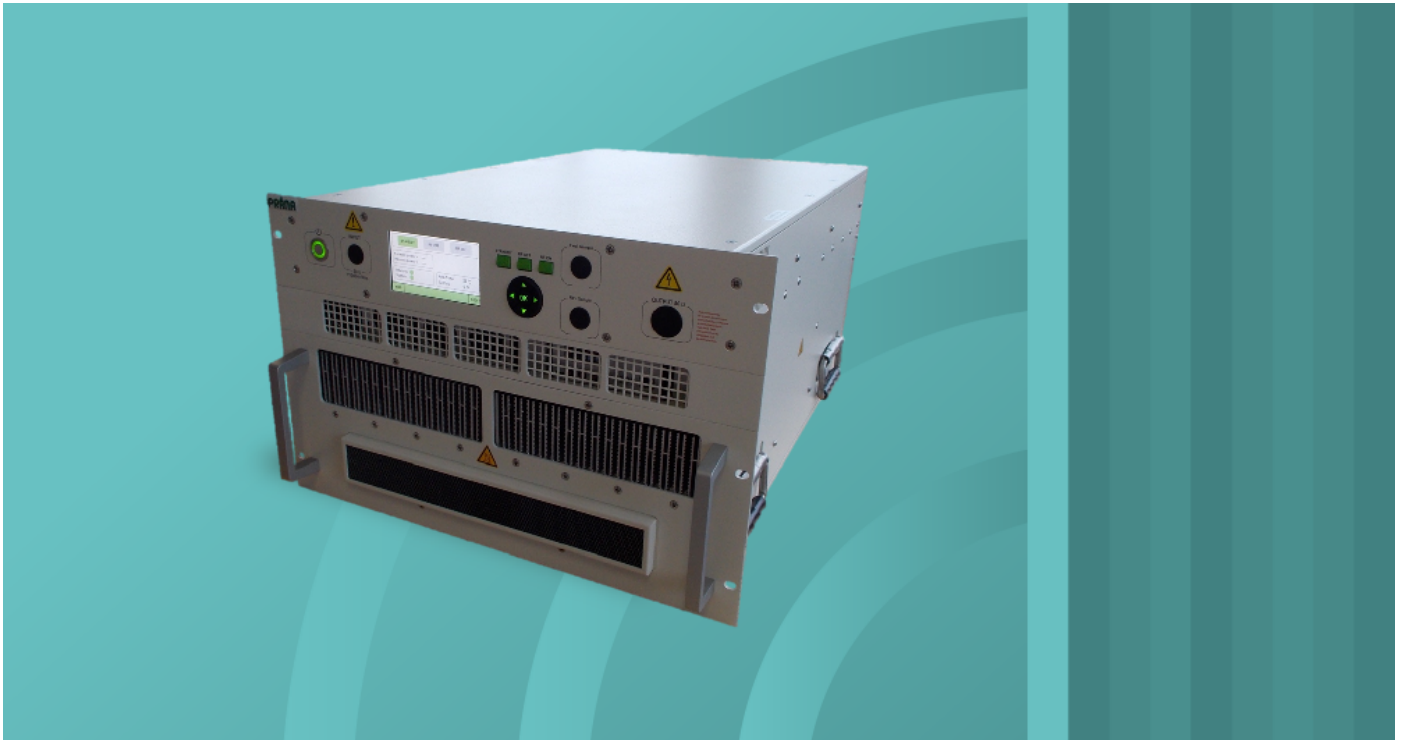

## Prana GN 1000

- Class A solid state
- Broadband (instantaneous single band): 100 kHz – 200 MHz
- Frequency extension between 80 kHz to 250 MHz upon request (with limited specifications)
- Typical output power : 1000 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
  - P1dB > 900 W and H < -20 dBc up to 100 MHz and
  - P1dB > 380 W and H < -20 dBc from 100 MHz to 200
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Reliable, efficient and robust
- 19" Rack
- 3 years standard warranty

## Maintenance

- Amplifier designed for minimal maintenance
  - Easy access to all parts
  - Modular design
  - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

## Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

## Versions

- GN 1000 D amplifier with:
  - Multicolor LCD display with touch panel
  - Digital control
  - IEEE 488 GPIB, Ethernet, USB, RS232 Communications
  - Temperature controlled fans
  - Safety interlock
- GN 1000 DC : GN 1000 D with :
  - Integrated dual directional coupler
  - Display of instantaneous incident and reflected power


## GN Range

- GN 40 => 40 W CW
- GN 500 => 500 W CW
- GN 1000 => 1000 W CW
- GN 2000 => 2000 W CW
- GN 3500 => 3500 W CW
- GN 7000 => 7000 W CW
- GN 12000 => 12000 W CW

## Extra

- External coupler
- Supply and integration inside a cabinet
- Bulk Current Injection + Calibration JIG
- RF Power cable
- Switching unit

GN1000 POWER AMPLIFIER 1000W / 100 KHz - 200 MHz

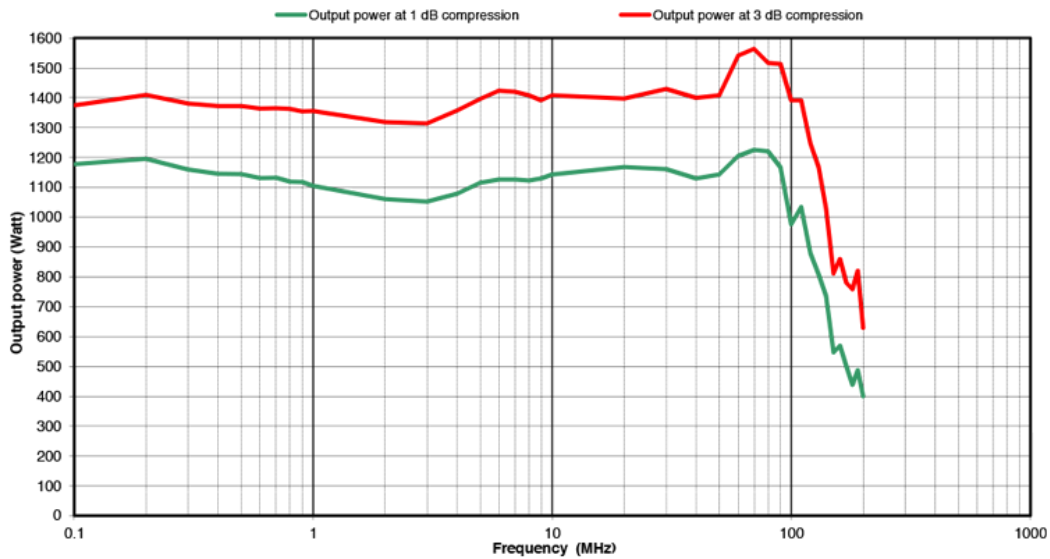

### Specifications

Frequency bandwidth	100 kHz - 200 MHz (Frequency extension between 80 kHz to 250 MHz upon request)
Typical output power	1000 W
Power at 3 dB compression	1100 W min. up to 100 MHz / 600 W min. from 100 MHz to 200 MHz
Power at 1 dB compression	900 W min. up to 100 MHz / 400 W min. from 100 MHz to 200 MHz
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression limit
Class type	Class A
Gain	58 dB
Linear power gain flatness	± 3 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1 max
Output impedance	50 ohms / VSWR: 2:1 max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type N fem. (front or rear panel) – other connector type on request
Safety interlock	Connector type BNC
Digital control	Transistors, power supplies, temperatures, fans
Communication interface	Ethernet, USB, GPIB, RS232
Color LCD Display with touch screen	Status, faults, (direct and reverse instantaneous power for DC version)
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air with fan speed control: 120 l/sec max. (self contained fans)
Power voltage	200-250 VAC, 47-63 Hz, single phase
Rated current	15.2 A at 230 VAC
Dimensions	640 x 450 x 360 mm (8U) / 25.2 x 17.7 x 14.2 in (8U)
Weight	54 kg / 119 lb

### GN 1000 DC version :

Integrated bidirectional power coupler	Coupling factor 59 dB typ.
Power coupling connector	Type N fem. (rear panel)
Estimated output power losses due to the coupler	0.3 dB